


# DC Motors

BLB4260-2413

Issue 04:CN5535

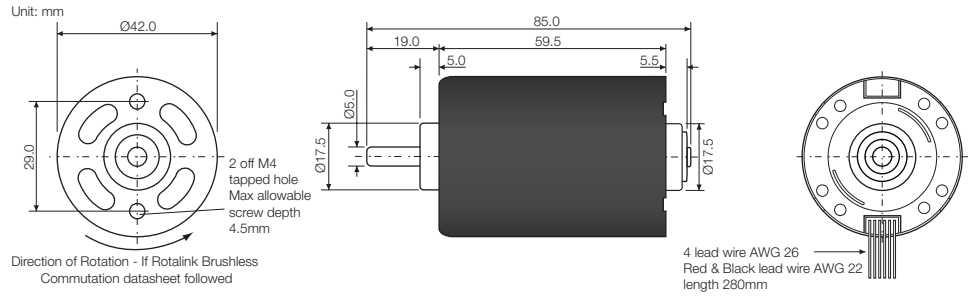

Performance									
Volts V	No Load		Max Cont. Power at 23°C				Stall		Max Power W
	Speed rpm	Current A	Speed rpm	Current A	Torque mNm	Output W	Torque mNm	Current A	
24	5000	0.23	3000	1.85	72.0	22.2	175.8	4.0	25.0

Performance characteristics and general specification are from calculated data.

## General Specification


Bearings	Ball race
Commutation	Built-in, with sensors
Rotation	CCW
Number of poles	8
Nominal resistance	3.3 Ω
Nominal Inductance	1.6 mH
Typical max. detent torque	5.5 mNm
Motor weight	275 g

Operating voltage	18-26 V
Signal voltage	0-5 V

## Connector Interface

Pin	Signal	Parameters	I/O	Specification
1	Op. Voltage (Red)		IN	18-26 V
2	Tacho Output (Yellow)	VOH	OUT	2V <sub>s</sub> V <sub>s</sub> 5V, at 5V 4.7 kΩ pull up
		VOL		0.6 V max
		Sink current		3 mA max
		Output pulse		12 pulse/round
3	Direction (White)	VOH	IN	2V <sub>s</sub> V <sub>s</sub> 5V or open :CCW
		VOL		0.8 V max :CW
4	GND (Black)		IN	
5	Speed Control (Blue)	VOH	IN	2V <sub>s</sub> V <sub>s</sub> 5V or open :motor stop
		VOL		0.8 V max motor drive
		PWM signal		20 kHz ~ 30 kHz
6	Brake (Green)	VOH	IN	2V <sub>s</sub> V <sub>s</sub> 5V or open : off
		VOL		0.8 V max : on

## Characteristics

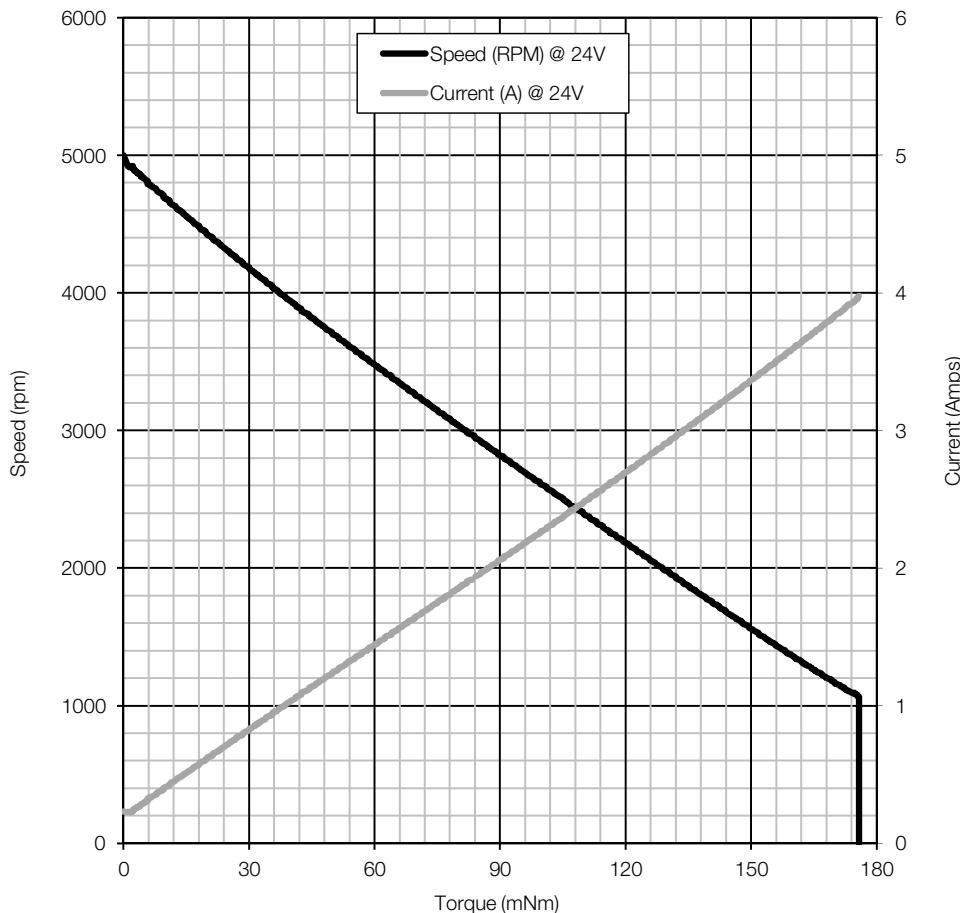

### Contact:

www.rotalink.com  
info@rotalink.com  
T: +44 (0)1460 72000

Rotalink Limited  
Cropmead, Crewkerne  
Somerset TA18 7HQ, UK

www.rotalink.com