


DC Motors

BLH4285-2443

Issue 04:CN3816

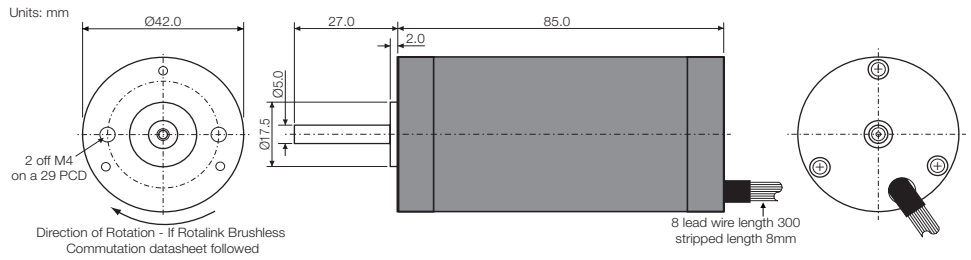


Model Number	Performance									
	Volts V	No Load		Maximum Efficiency				Stall		Max Power W
		Speed rpm	Current A	Speed rpm	Current A	Torque mNm	Output W	Torque mNm	Current A	
BLH4285-2443	24	5562	0.36	4507	2.33	91.38	43.13	870.00	33.00	97.28

Performance characteristics and general specification are measured & predicted from sample motor.

Hall Effect Sensor Wire 26 AWG					Motor Phase Wire 22 AWG		
HA	HB	HC	+5	GND	M1	M2	M3
Orange	Blue	Brown	Yellow	White	Red	Green	Black

Characteristics

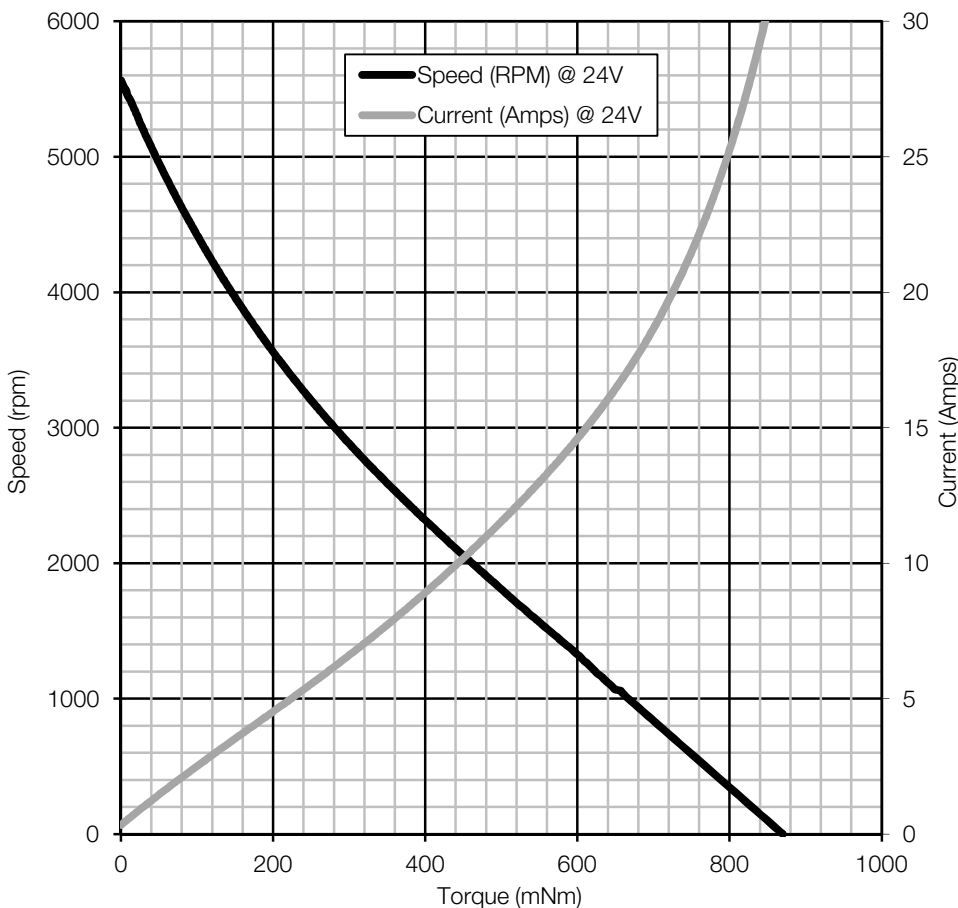

General Specification

Bearings	Ball Race
Commutation	Hall Effect Sensors
Rotation	Bi-directional
Number of poles	8
Operating voltage	24 V
Nominal resistance	0.71 Ω
Nominal Inductance	0.86 mH
Typical detent torque	10 mNm
Weight	550 g

Contact:

www.rotalink.com
info@rotalink.com
 T: +44 (0)1460 72000

Rotalink Limited
 Cropmead, Crewkerne
 Somerset TA18 7HQ, UK

www.rotalink.com