


DC Motors

D2431-15370

Issue 17:CN3815


Unit: mm

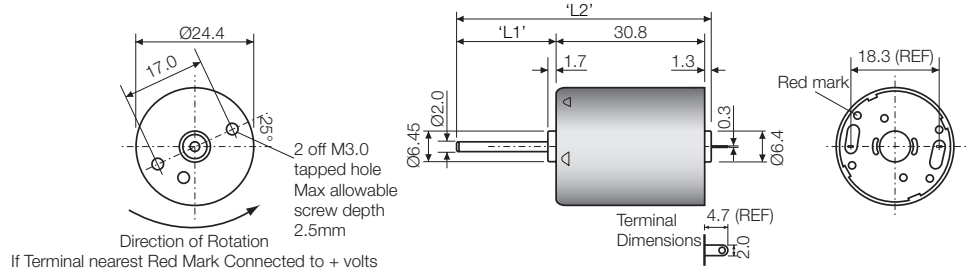

Model Number	Performance									
	Volts V	No Load		Maximum Efficiency				Stall		Max Power W
		Speed rpm	Current A	Speed rpm	Current A	Torque mNm	Output W	Torque mNm	Current A	
D2431-15370	12	5500	0.03	4695	0.15	2.4	1.2	16.2	1.4	2.3
	9	4125	0.03	3558	0.20	1.7	0.6	12.2	1.1	1.3
	6	2750	0.03	2318	0.13	1.3	0.3	8.1	0.7	0.6
	3	1375	0.02	1103	0.10	0.8	0.1	4.1	0.4	0.1

Performance characteristics and general specification are from calculated data.

Characteristics

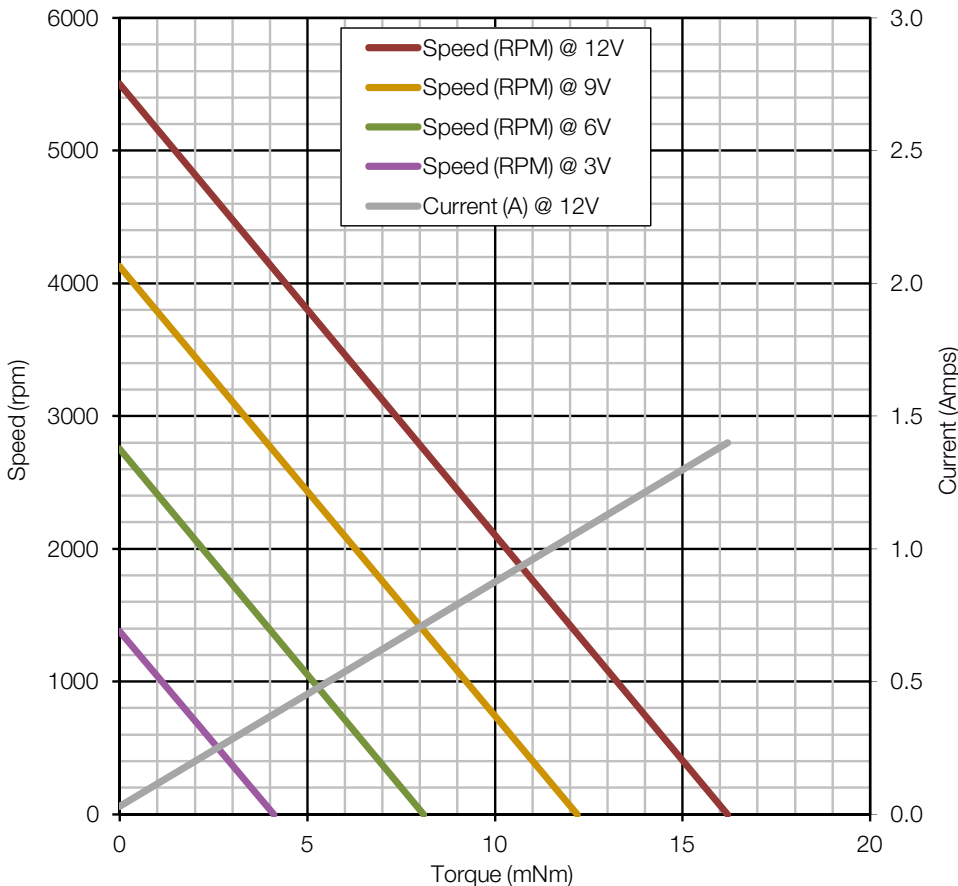

General Specification

- Bearings: Sintered
- Brushes: Precious metal
- Rotation: Bi-directional
- Number of poles: 3
- Operating voltage: 3 V to 12 V
- Nominal resistance: 11.5 Ω
- Nominal inductance: 14.3 mH
- Typical detent torque: 0.5 mNm
- Suppression: Internal ring varistor
- Weight (D2431-15370): 50 g

Shaft length options 'L1','L2'

- D2431-15370: 20.7mm, 52.8mm
- D2431-15370S: 10.7mm, 42.8mm

Contact:

www.rotalink.com
info@rotalink.com
T: +44 (0)1460 72000

Rotalink Limited
Cropmead, Crewkerne
Somerset TA18 7HQ, UK

www.rotalink.com