


DC Motors

D3650-22100V


Issue 14:CN3815

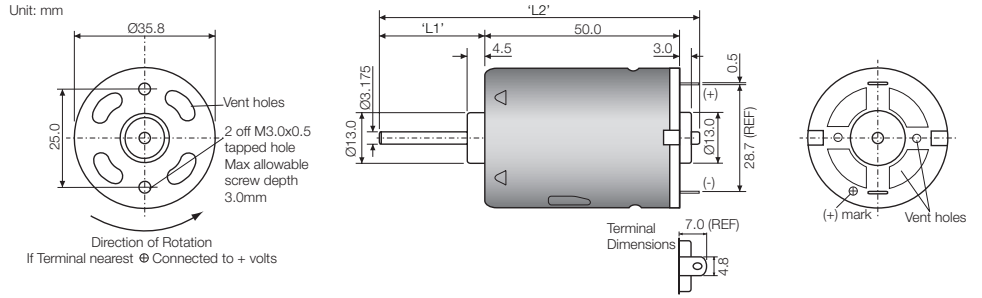

Model Number	Performance									
	Volts V	No Load		Maximum Efficiency				Stall		Max Power W
		Speed rpm	Current A	Speed rpm	Current A	Torque mNm	Output W	Torque mNm	Current A	
D3650-22100V	24	9000	0.28	7643	1.50	19.8	15.9	131.4	8.2	31.0
	12	4500	0.22	3645	0.70	12.5	4.8	65.7	4.1	7.7

Performance characteristics and general specification are from calculated data.

Characteristics

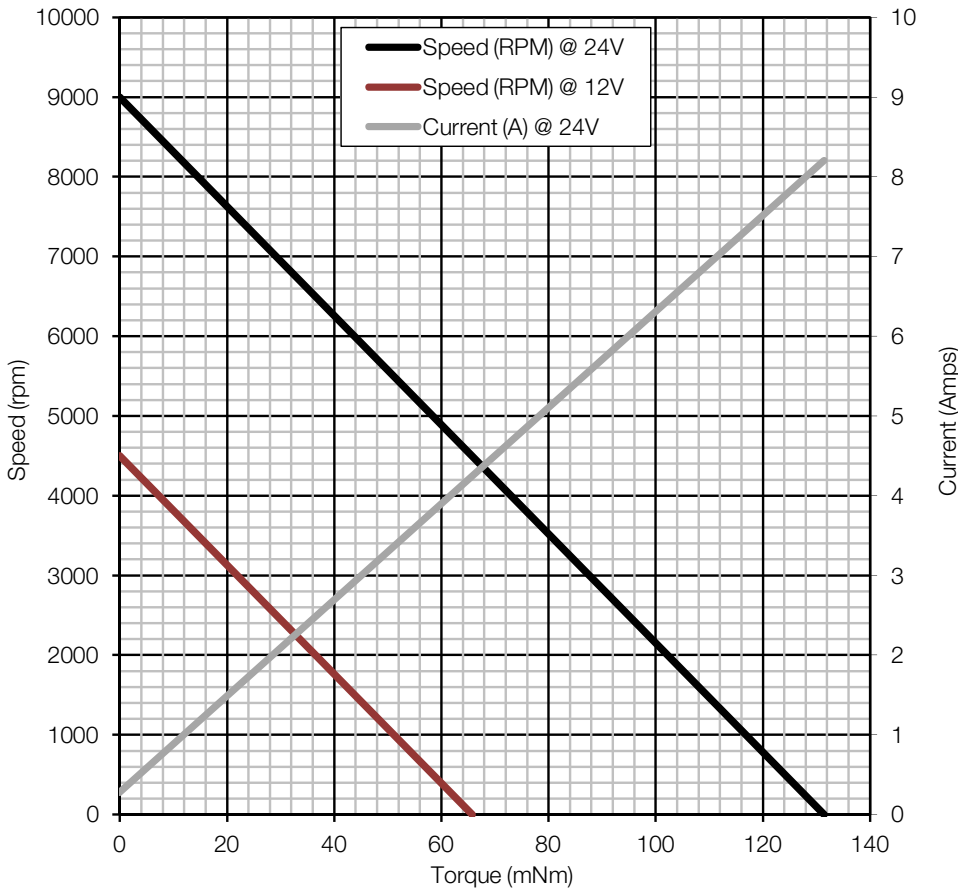

General Specification

Bearings	Sintered
Brushes	Carbon
Rotation	Bi-directional
Number of poles	5
Operating voltage	9 V to 30 V
Nominal resistance	4.4 Ω
Nominal inductance	3 mH
Typical detent torque	6 mNm
Suppression	Internal ring varistor
Weight (D3650-22100V)	150 g
Shaft length options 'L1', 'L2'	
D3650-22100V	27.0mm, 82.0 mm
D3650-22100VS	13.3mm, 67.0 mm

Contact:

www.rotalink.com
info@rotalink.com
T: +44 (0)1460 72000

Rotalink Limited
Cropmead, Crewkerne
Somerset TA18 7HQ, UK

www.rotalink.com