



# Permanent Magnet Stepping Motors

SU2513-024

Issue 03:CN3815

Units: mm

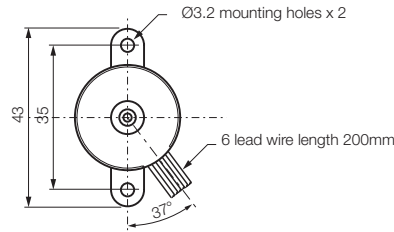

Model Number	Phase voltage (V)	Phase current (A)	Phase resistance (Ω)	Phase inductance (mH)	Winding
SU2513-024-021-06	6	0.240	21	5	Uni-polar
SU2513-024-080-12	12	0.150	80	20	


## General Specification

Holding torque	10mNm
Step angle	15°
Rotor Inertia	0.07 kgm <sup>2</sup> x10 <sup>-6</sup>
Temperature rise	80°C
Ambient temp. range	-5°C to +40°C
Weight	28g

## Motor options


- Alternative voltage/phase resistance
- Alternative shaft lengths
- Alternative lead lengths
- 10 mm front bearing

## Characteristics

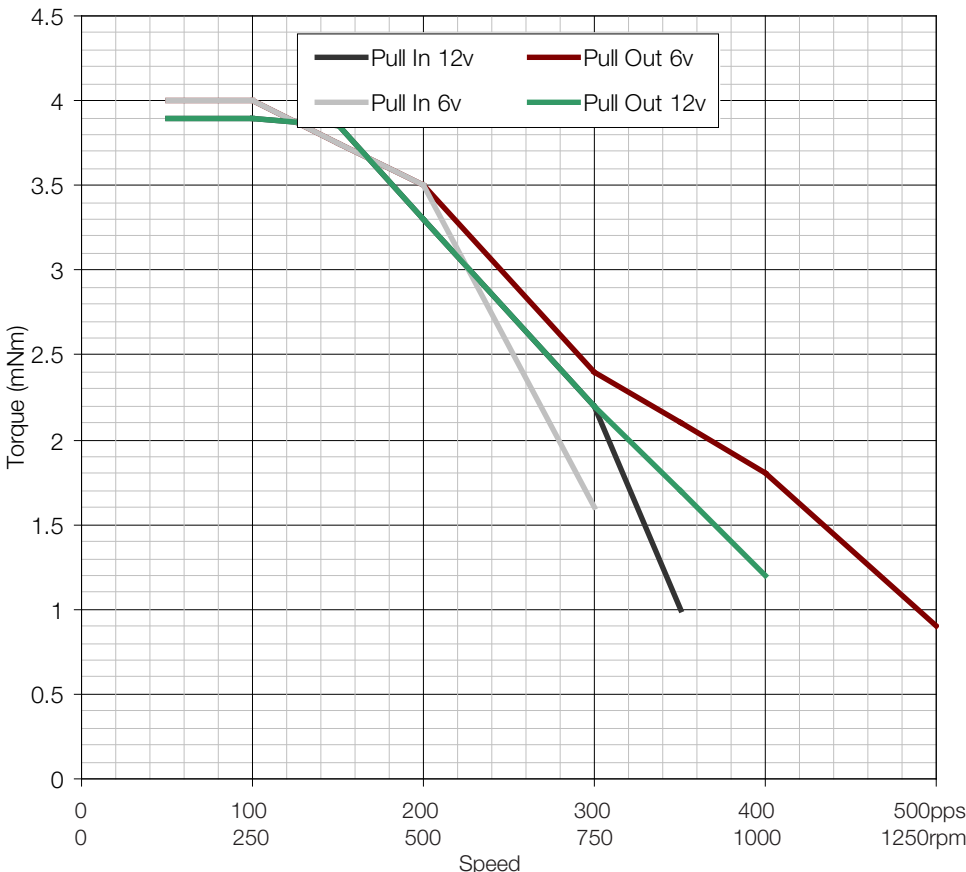

## Full step uni-polar sequence

CW dir.	Step 1	Step 2	Step 3	Step 4
Brown	Off	On	On	Off
Black	On	Off	Off	On
Yellow	Off	Off	On	On
White	On	On	Off	Off



(Connect green and red wires to positive supply)

## Contact:

[www.rotalink.com](http://www.rotalink.com)  
[info@rotalink.com](mailto:info@rotalink.com)  
 T: +44 (0)1460 72000

Rotalink Limited  
 Cropmead, Crewkerne  
 Somerset TA18 7HQ, UK

[www.rotalink.com](http://www.rotalink.com)