

Gearboxes

Type 225

Spur Ovoid


Issue 08:CN4023



Rotalink

Miniature Motors, Transmission and Control


Units: mm

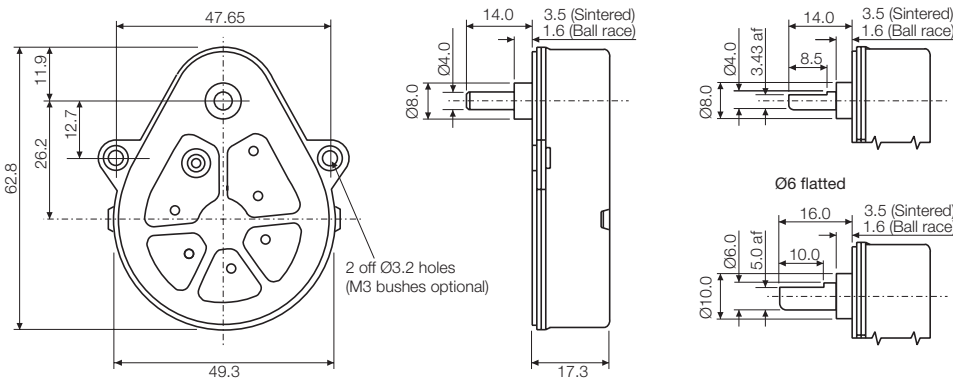

Typical Ratios

25:4	150:1	4000:1
20:3	200:1	5000:1
25:3	250:1	6000:1
10:1	300:1	7500:1
15:1	400:1	10000:1
20:1	500:1	15000:1
30:1	600:1	30000:1
40:1	750:1	60000:1
50:1	900:1	90000:1
60:1	1000:1	120000:1
80:1	1500:1	180000:1
100:1	2000:1	360000:1
125:1	3000:1	720000:1

Characteristics

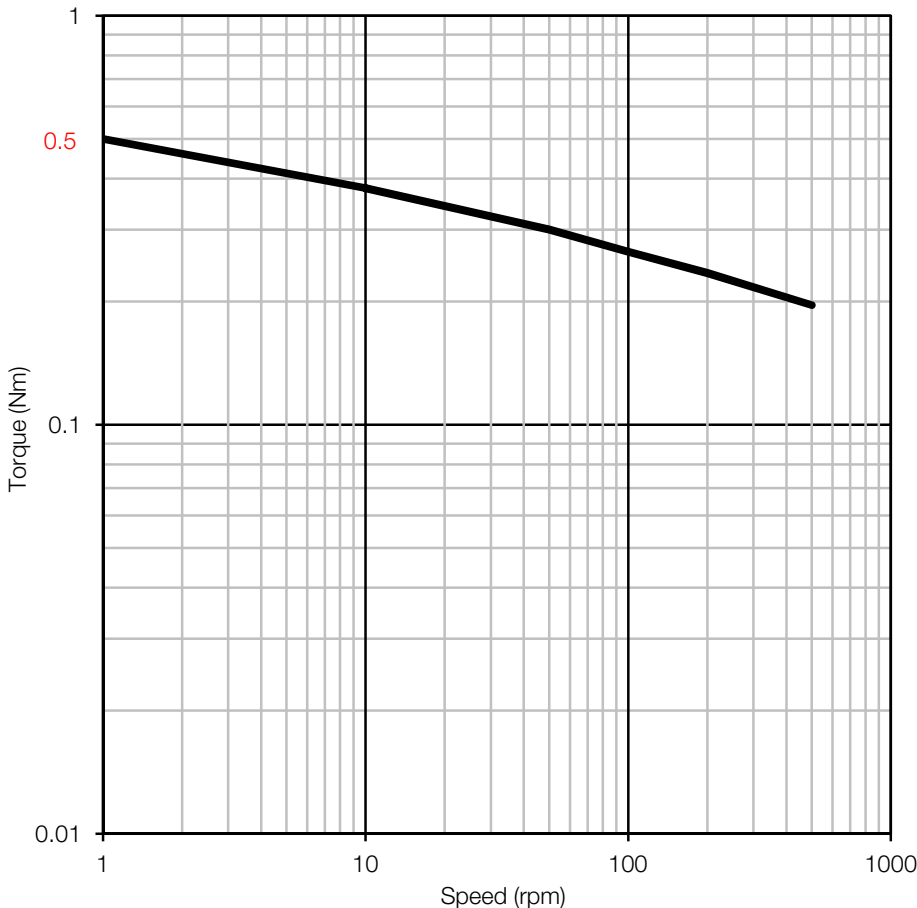

General Specification

Zinc plated pressed steel gearbox case and front cover. Acetal spur gears running on fixed steel spindles. Stainless steel shaft, sintered bronze front and nylon back bearing. Maximum temperature 80°C at the gearcase.

Gearbox Options

- Special shafts
- Ball race bearings
- Slipping clutch. Nominal setting 30Ncm & 50Ncm (±30%)
- M3 threaded eyelets - Min bulkhead thickness for countersunk screws, 2mm

Contact:

www.rotalink.com
info@rotalink.com
 T: +44 (0)1460 72000

Rotalink Limited
 Cropmead, Crewkerne
 Somerset TA18 7HQ, UK

www.rotalink.com

This drawing and any information, descriptions and know how contained hereon (altogether "the drawing") are confidential and are the sole property of Rotalink Limited. Rotalink Limited owns all copyright, design right and all other intellectual property in the drawing and neither the drawing nor any part of it may be disclosed, loaned, copied, used for manufacturing or in relation to tenders or used for any other purpose without the express written permission of Rotalink Limited.

The contents of this data sheet are intended as reference material not product specification and are subject to alteration without prior notice. Please contact our sales team for detailed information.