


Gearboxes


Type 226

Issue 03

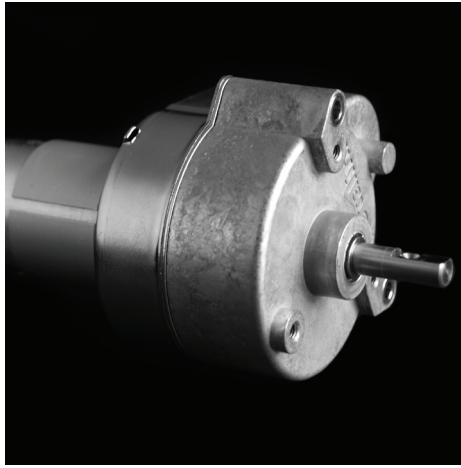

Rotalink
Miniature Motors, Transmission and Control


Units: mm

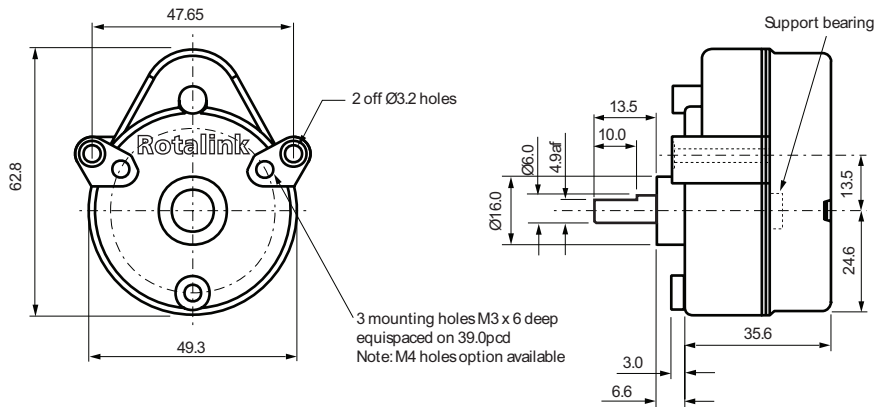

Typical Ratios

25:1	120:1	1000:1
80:3	200:1	1200:1
100:3	240:1	1600:1
40:1	250:1	1800:1
50:1	400:1	2500:1
60:1	500:1	6000:1
200:3	600:1	30000:1
80:1	2000:3	
100:1	800:1	

Characteristics

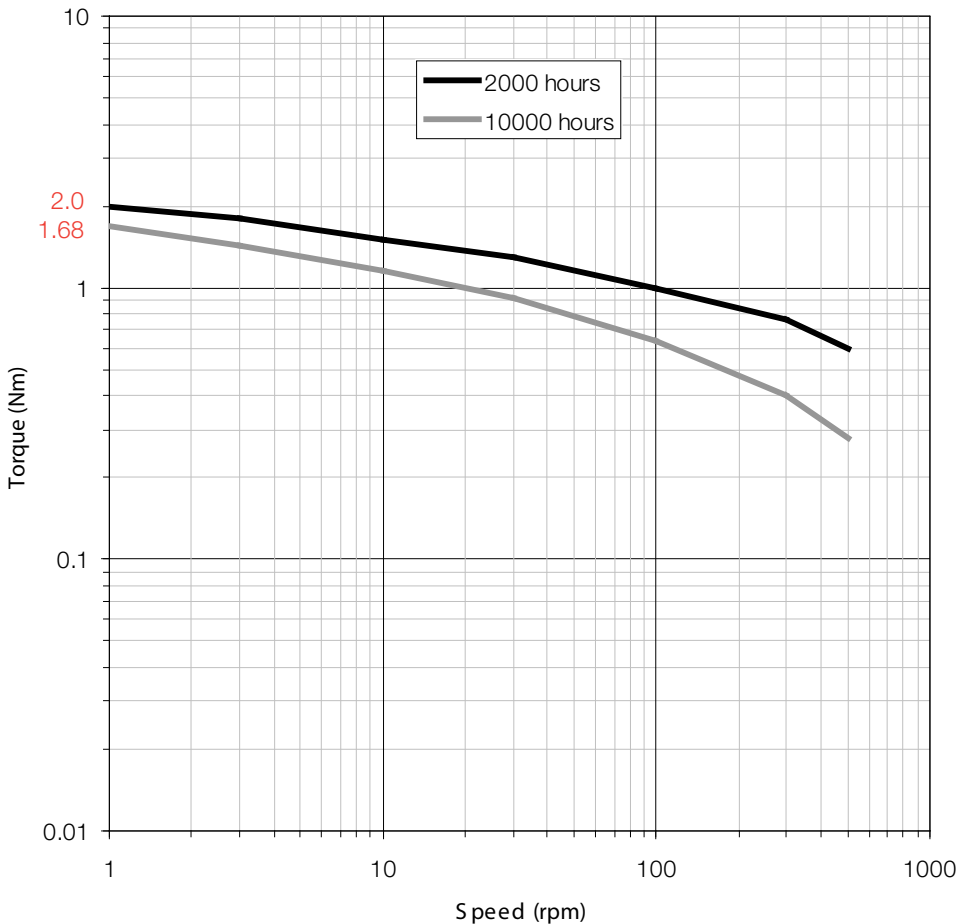

General Specification

Type 225 gearbox with zinc alloy secondary gearbox. Acetal spur gears, centrally placed stainless steel shaft. 225 rear nylon bearing, sintered bronze bearing at front. Maximum temperature, 80°C at the gearcase.

Gearbox Options

Special shafts
Ball race bearings

Contact:

www.rotalink.com
info@rotalink.com
T: +44 (0)1460 72000
F: +44 (0)1460 74278

Rotalink Limited
Cropmead, Crewkerne
Somerset TA18 7HQ, UK

www.rotalink.com