Gearboxes

Type 226

Spur Ovoid

Issue 04:CN2184

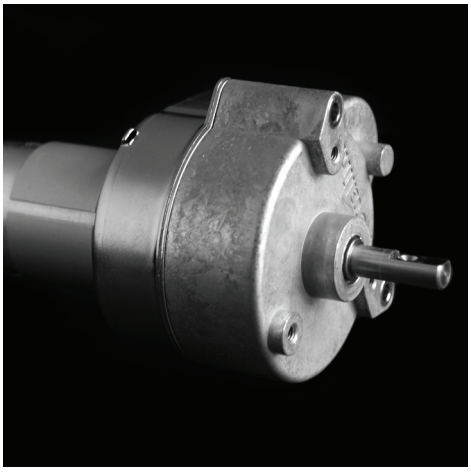

Rotalink
Miniature Motors,Transmission and Control

Units: mm

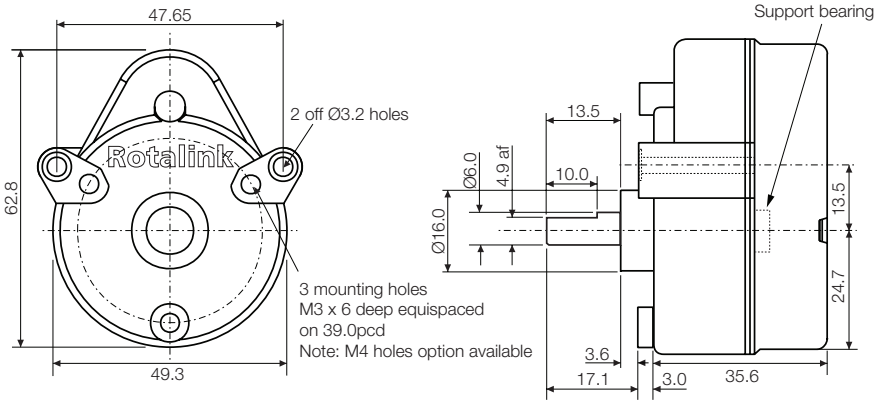

Typical Ratios

25:1	120:1	1000:1
80:3	200:1	1200:1
100:3	240:1	1600:1
40:1	250:1	1800:1
50:1	400:1	2500:1
60:1	500:1	6000:1
200:3	600:1	30000:1
80:1	2000:3	
100:1	800:1	

Characteristics

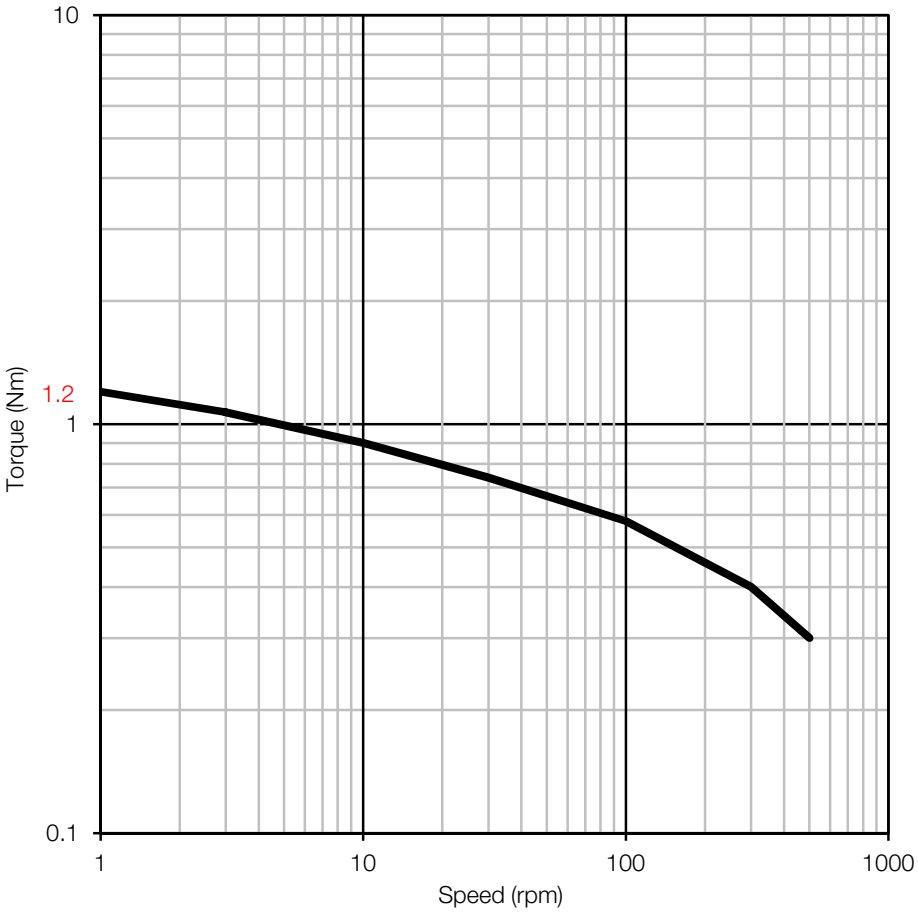

General Specification

Type 225 gearbox with zinc alloy secondary gearbox. Acetal spur gears, centrally placed stainless steel shaft. 225 rear nylon bearing, sintered bronze bearing at front. Maximum temperature, 80ºC at the gearcase.

Gearbox Options

Special shafts
Ball race bearings

Contact:
www.rotalink.com
info@rotalink.com
T: +44 (0)1460 72000
F: +44 (0)1460 74278

Rotalink Limited
Cropmead, Crewkerne
Somerset TA18 7HQ, UK

www.rotalink.com

This drawing and any information, descriptions and know how contained hereon (altogether "the drawing") are confidential and are the sole property of Rotalink Limited. Rotalink Limited owns all copyright, design right and all other intellectual property in the drawing and neither the drawing nor any part of it may be disclosed, loaned, copied, used for manufacturing or in relation to tenders or used for any other purpose without the express written permission of Rotalink Limited.