



Gearboxes

Type RG27

Spur In-line

Issue 07:CN3815


Units: mm

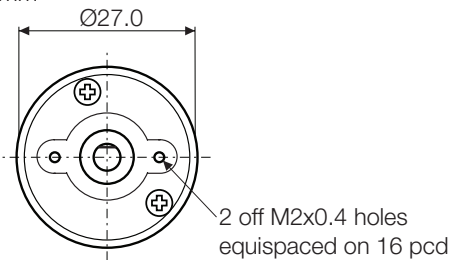

Typical Ratios

| | |
|-------------------|---------------------|
| 15:1 | 250:1 (11264:45) |
| 30:1 | 360:1 (45056:125) |
| 60:1 | 500:1 (22528:45) |
| 100:1 (22528:225) | 700:1 (262144:375) |
| 150:1 (768:5) | 900:1 (22503/25) |
| 200:1 (45056:225) | 1150:1 (720896:625) |

Characteristics

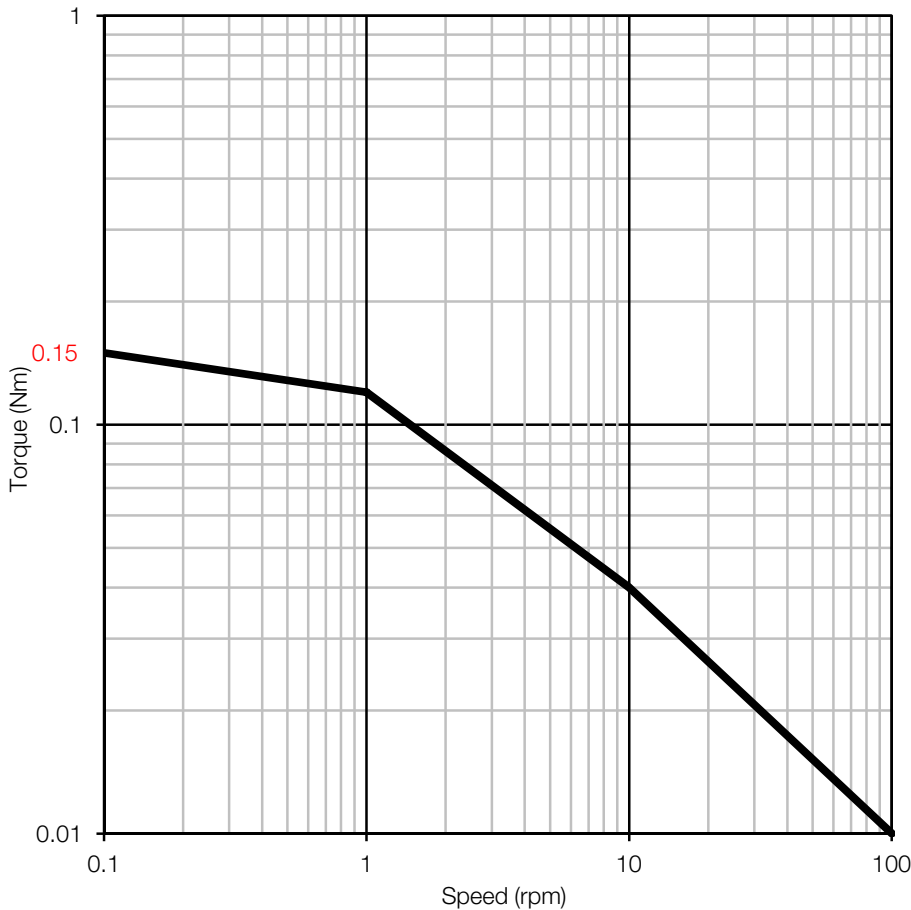

General Specification

Zinc plated steel pressings with 2 point fixing.
Brass spur gears running on fixed spindles.
Steel drive shaft with sleeve bearings.
Maximum temperature, 80°C at the gearcase.

Contact:

www.rotalink.com
info@rotalink.com
T: +44 (0)1460 72000

Rotalink Limited
Cropmead, Crewkerne
Somerset TA18 7HQ, UK

www.rotalink.com