

# Gearboxes


## Type RG37

Issue 03



**Rotalink**  
Miniature Motors, Transmission and Control


Units: mm

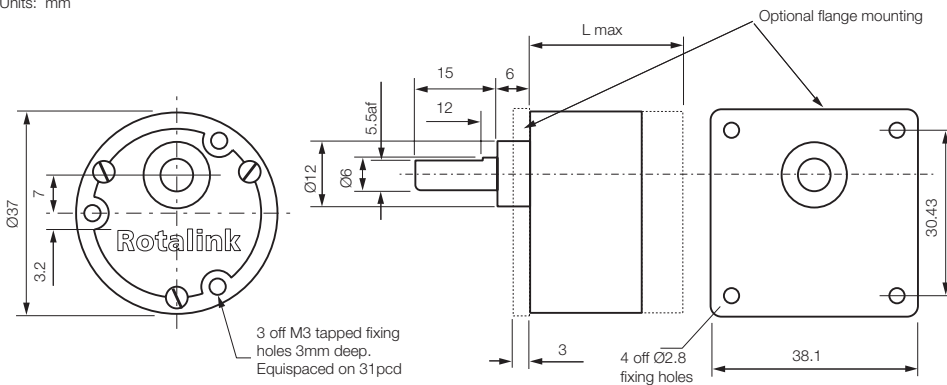

### Typical Ratios

18:1	- 'L' 20.5 mm
30:1	- 'L' 20.5 mm
50:1	- 'L' 23.0 mm
100:1	- 'L' 23.0 mm
180:1	- 'L' 25.5 mm
250:1	- 'L' 25.5 mm
500:1	- 'L' 28.0 mm
1000:1	- 'L' 28.0 mm
3000:1	- 'L' 30.5 mm

### Characteristics

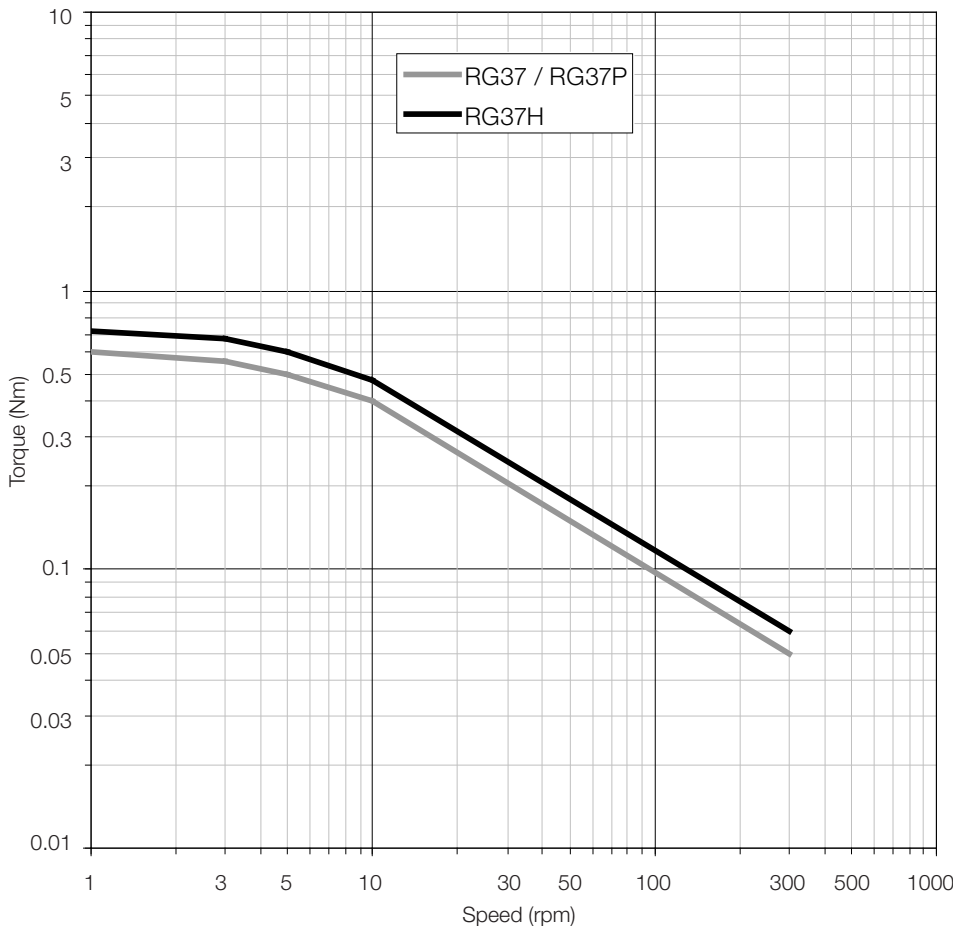

### General Specification

Die cast cover enclosing steel end plate with 3 point equispaced fixing. Sintered spur gears (first gear Tufnel) running on fixed spindles. Silver steel shaft with sintered steel bearings. Temperature range, -10 to 60°C at the gearcase.

### Gearbox Options

Moulded first gear: RG37P  
Brass first gear: RG37H

### Contact:

[www.rotalink.com](http://www.rotalink.com)  
[info@rotalink.com](mailto:info@rotalink.com)  
T: +44 (0)1460 72000  
F: +44 (0)1460 74278

Rotalink Limited  
Cropmead, Crewkerne  
Somerset TA18 7HQ, UK

[www.rotalink.com](http://www.rotalink.com)